


SAS-IC-1200™ Recirculating Way Table




Product Dimensions

Dimensions - Top View

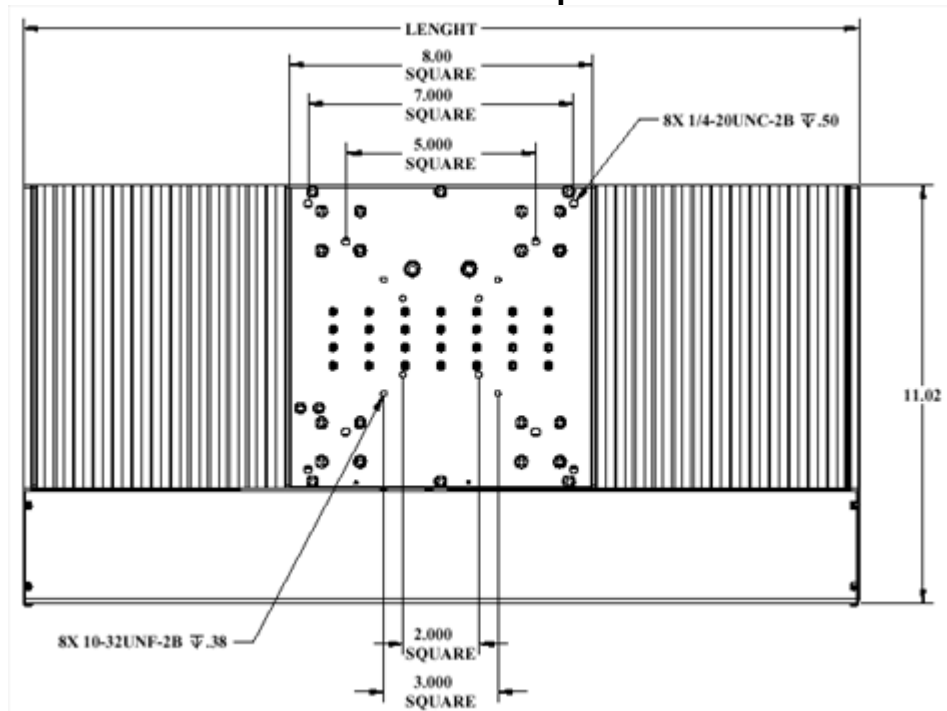

Dimensions - Side View

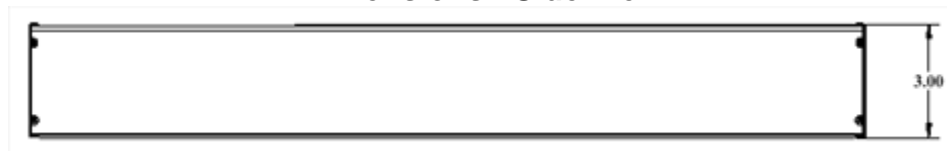

For Further Information Contact

Heason Technologies Group Ltd

Tel: +44(0)1403 755800

Fax: +44(0)1403 755810


Email: sales@heason.com

Freephone 0800 374903 www.heason.com




SAS-IC-1200™ Recirculating Way Table

Dimensions - Bottom View

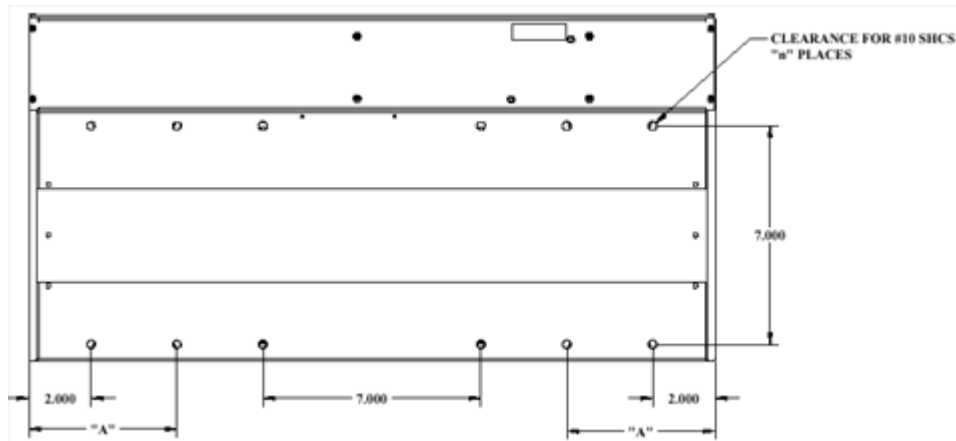

Dimensions - End View

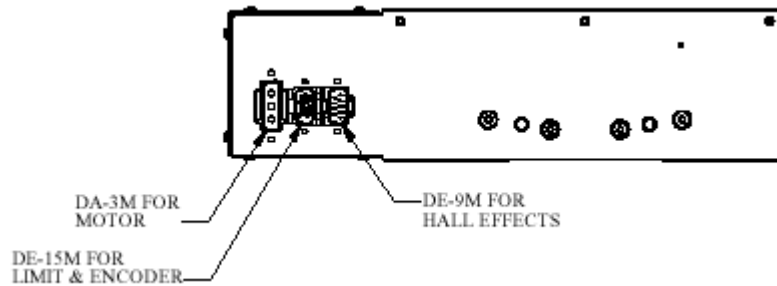

For Further Information Contact

Heason Technologies Group Ltd

Tel: +44(0)1403 755800

Fax: +44(0)1403 755810

Email: sales@heason.com

Freephone 0800 374903 www.heason.com

Heason
Technologies Group

SAS-IC-1200™ Recirculating Way Table

Specifications

Travel (inches)	12
Overall Height (inches)	3
Positional Accuracy (μm) ¹	9
Resolution (μm)	5, 1, 0.5, 0.1
Bi-directional Repeatability (arc-seconds)	± 1 count
Load Capacity (g) ²	70
Maximum Acceleration (m/sec^2) ²	50
Maximum Velocity (m/sec)	5
Mass (kg)	Moving 6.6 Total 23
Motor Force Constant (N/A)	44.6
Fundamental Motor Constant (130°C)	20.5N / $\sqrt{\text{Watt}}$
Back-emf Constant (V/m/s)	42.0
Coil Resistance (25°C, Ohm)	3.0
Coil Inductance (mH)	9.7
Continuous Current (130°C, Amps)	3.3
Peak Current (Amps)	13.7
Continuous Force (130°C, N)	171
Peak Force (N)	560
Continuous Power Rating (Watts)	69
Pitch & Yaw (arc-seconds)	20
Flatness & Straightness (μm)	5

¹ With 2 point slope correction.

² Please contact our Applications Engineers for loads exceeding 75kg.

³ The maximum speed is encoder and load dependent.

For Further Information Contact

Heason Technologies Group Ltd

Tel: +44(0)1403 755800

Fax: +44(0)1403 755810

Email: sales@heason.com

Freephone 0800 374903 www.heason.com

