

# M75D

## Ball Screw Drive, Slide Guide, Double Ball Nuts

» Ordering key - see page 208  
 » Accessories - see page 137  
 » Additional data - see page 192

### General Specifications

Parameter	M75D
Profile size (w × h) [mm]	86 × 75
Type of screw	ball screw with double nut
Carriage sealing system	self-adjusting steel cover band
Screw supports	number of screw supports to be specified by customer at order
Lubrication	lubrication of ball screw
Included accessories	none

### Performance Specifications

Parameter		M75D
Stroke length (S max), maximum	[mm]	3550
Linear speed, maximum	[m/s]	1,6
Acceleration, maximum	[m/s <sup>2</sup> ]	8
Repeatability	[± mm]	0,05
Input speed, maximum	[rpm]	5000
Operation temperature limits	[°C]	-20 – 70
Dynamic load (Fx), maximum	[N]	2500 <sup>1</sup>
Dynamic load (Fy), maximum	[N]	1485 <sup>1</sup>
Dynamic load (Fz), maximum	[N]	1485 <sup>1</sup>
Dynamic load torque (Mx), maximum	[Nm]	49 <sup>1</sup>
Dynamic load torque (My), maximum	[Nm]	85 <sup>1</sup>
Dynamic load torque (Mz), maximum	[Nm]	85 <sup>1</sup>
Drive shaft force (Frd), maximum	[N]	600
Drive shaft torque (Mta), maximum	[Nm]	30
Screw diameter (d <sub>0</sub> )	[mm]	20
Screw lead (p)	[mm]	5, 20
Weight	[kg]	
of unit with zero stroke		6,57
of every 100 mm of stroke		0,82
of carriage		1,70
of option single screw support		1,70
of option double screw supports		3,58


<sup>1</sup> Value for the complete unit

### Carriage Idle Torque (M<sub>idle</sub>) [Nm]


Input speed [rpm]	Screw lead [mm]	
	p = 5	p = 20
500 - no screw supports	0,15	0,5
500 - with screw supports	0,2	0,8

M<sub>idle</sub> = the input torque needed to move the carriage with no load on it.

### Deflection of the Profile

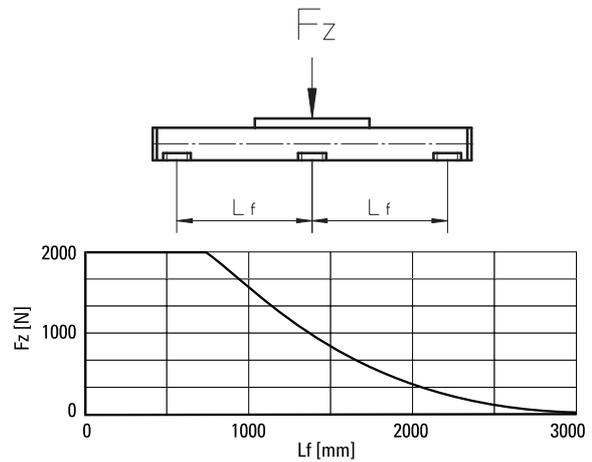


### Critical Speed

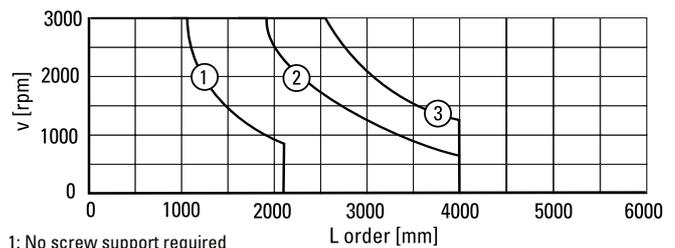


1: No screw support required  
 2: Single screw support required  
 3: Double screw supports required

### Definition of Forces

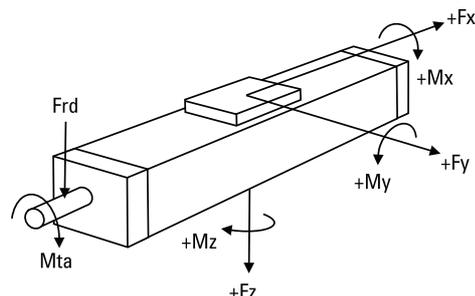

# M75D

## Ball Screw Drive, Slide Guide, Double Ball Nuts

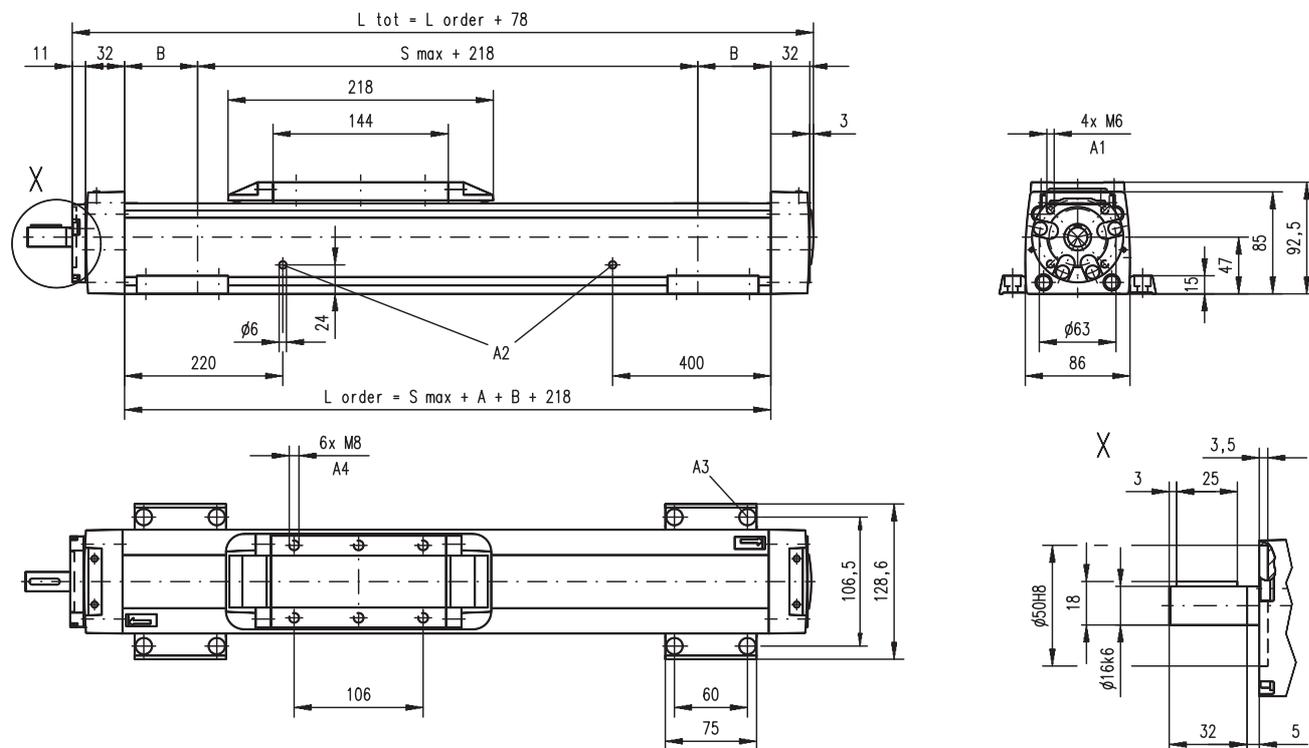


A1: depth 9, Heli coil  
A2: lubrication holes

A3:  $\phi 13,5/\phi 8,5$  for socket head cap screw M8  
A4: depth 8, Heli coil

Screw support configuration	A [mm]	B [mm]	Ordering length (L order) [mm]	Total length (L tot) [mm]
No screw support	5	76	$L_{order} = S_{max} + A + B + 218$	$L_{tot} = L_{order} + 78$
Single screw support	60	151	$L_{order} = S_{max} + A + B + 218$	$L_{tot} = L_{order} + 78$
Double screw supports	126	216	$L_{order} = S_{max} + A + B + 218$	$L_{tot} = L_{order} + 78$

### Double Carriages

Parameter	M75D	
Minimum distance between carriages (Lc) [mm]	[mm]	250
Dynamic load (Fy), maximum [N]	[N]	2227
Dynamic load (Fz), maximum [N]	[N]	2227
Dynamic load torque (My), maximum [Nm]	[Nm]	$L_c^1 \times 1,114$
Dynamic load torque (Mz), maximum [Nm]	[Nm]	$L_c^1 \times 1,114$
Force required to move second carriage [N]	[N]	40
Weight of unit with zero stroke of carriages [kg]	[kg]	6,92 3,4

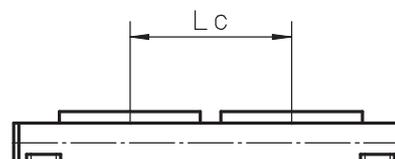

Screw support configuration	A [mm]	B [mm]	Ordering length (L order) [mm]	Total length (L tot) [mm]
No screw support	5	76	$L_{order} = S_{max} + A + B + L_c + 218$	$L_{tot} = L_{order} + 78$
Single screw support	60	151	$L_{order} = S_{max} + A + B + L_c + 218$	$L_{tot} = L_{order} + 78$
Double screw supports	126	216	$L_{order} = S_{max} + A + B + L_c + 218$	$L_{tot} = L_{order} + 78$

<sup>1</sup> Value in mm