


## V-Thread Screws

Burnished Finish 303 Stainless Steel

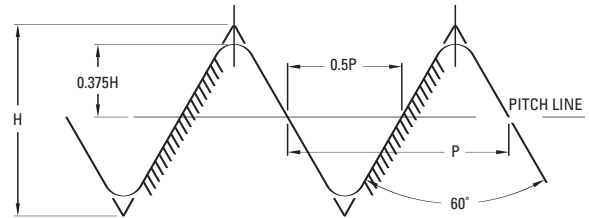

- Some sizes available in 1018 Steel
- Matching Supernuts and Left Hand Screws on special request
- Lead Accuracy is .015 in/ft

| Diameter | Lead   | Size   | Part No.      | Recommended Bearing |
|----------|--------|--------|---------------|---------------------|
| 6mm      | 1mm    | 6 x 1  | <b>SV6x1</b>  | 4mm                 |
| 1/4"     | 0.0125 | 1/4-80 | <b>SV2580</b> | 4mm                 |
|          | 0.0208 | 1/4-48 | <b>SV2548</b> |                     |
|          | 0.0250 | 1/4-40 | <b>SV2540</b> |                     |
|          | 0.0278 | 1/4-36 | <b>SV2536</b> |                     |
|          | 0.0313 | 1/4-32 | <b>SV2532</b> |                     |
|          | 0.0357 | 1/4-28 | <b>SV2528</b> |                     |
|          | 0.0417 | 1/4-24 | <b>SV2524</b> |                     |
| 3/8"     | 0.0500 | 1/4-20 | <b>SV2520</b> | 4 to 6mm            |
|          | 0.0250 | 3/8-40 | <b>SV3740</b> |                     |
|          | 0.0313 | 3/8-32 | <b>SV3732</b> |                     |
|          | 0.0417 | 3/8-24 | <b>SV3724</b> |                     |
|          | 0.0500 | 3/8-20 | <b>SV3720</b> |                     |
|          | 0.0625 | 3/8-16 | <b>SV3716</b> |                     |
| 1/2"     | 0.0833 | 3/8-12 | <b>SV3712</b> | 6 to 8mm            |
|          | 0.0250 | 1/2-40 | <b>SV5040</b> |                     |
|          | 0.0333 | 1/2-30 | <b>SV5030</b> |                     |
|          | 0.0500 | 1/2-20 | <b>SV5020</b> |                     |
|          | 0.0625 | 1/2-16 | <b>SV5016</b> |                     |
|          | 0.0769 | 1/2-13 | <b>SV5013</b> |                     |